




KZR-T125 DIESEL GENERATOR SET / 50Hz

OUTPUT RATINGS		50Hz / 400V	
STAND BY POWER	kVA	125	
	kW	100	
PRIME POWER	kVA	113	
	kW	90	

ENGINE (ESP -STAND-BY)	
Manufacturer	RICARDO
Origin	CHINA
Model	R6105ZLD
No of Cylinder / Configuration	6 / IN LINE
Displacement (lt)	6.49
Bore / Stroke (mm)	105 / 125
Cycle	4
Compression Ratio	16.00: 1
Aspiration	Turbo charged
Governor Type	ELECTRONIC
Cooling System	WATER
Coolant Capacity (lt)	23
Lubrication Oil Capacity (lt)	18
Injection	Direct
Speed / Frequency	1500 / 50Hz
Engine Gross Power (kWm)	110
Fuel Consumption (gr/kWxh)	%100 218

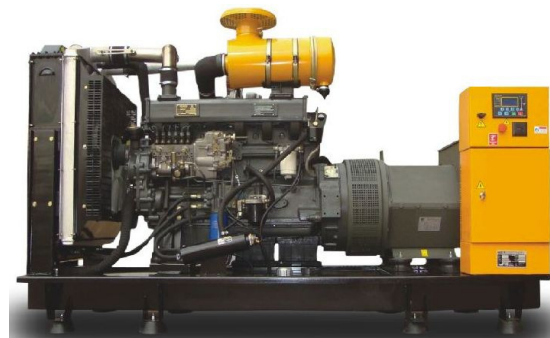

Emergency Standby Power (ESP)

Output available with varying load for the duration of an emergency outage. Average power output is 70% of the emergency standby power rating. Typical operation is 50 hours per year with maximum expected usage of 200 hours per year.

Prime Power

Prime power is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%.





KZR-T125 DIESEL GENERATOR SET / 50Hz

ALTERNATOR

Manufacturer	GENTECH
Origin	TURKEY
No of Phase	3
Power Factor	cosφ 0,8
Number of Bearing	SINGLE
No of Poles	4
No of Leads	12
Voltage Regulation (Steady State)	± %1
Insulation Class	H
Degree of Protection	IP 21/23
Excitation System	AVR ,Brushless
Connection Type	STAR
Total Harmonic Content (No Load)	< %2
Frequency (Hz)	50
Voltage Output (VAC)	230 / 400
Efficiency (%)	%93.8



Chassis - Mounted on the steel base
 chassis - Fuel tank is located in the chassis
 chassis - Mechanical fuel indicator -
 Rubber brackets that prevent vibration

Sound-proof canopy - Special design for minimizing acoustic level - Special type muffler and heat insulation -Acoustic insulation with rot-proof,moisture-repellent and non-flammable material

DIMENSIONS	W x L x H (mm)	Weight (kg)	Fuel Tank (lt)	Noise dB(A)
CANOPIED	1100x3000x1800	1500	220	TBA
OPEN SET	1100x2200x1700	1200	220	TBA

CONTROL UNIT

STANDART: DATAKOM DKG 309



OPTION : Deepsea



KZ POWER reserves the right to amend details and specifications without notice.